
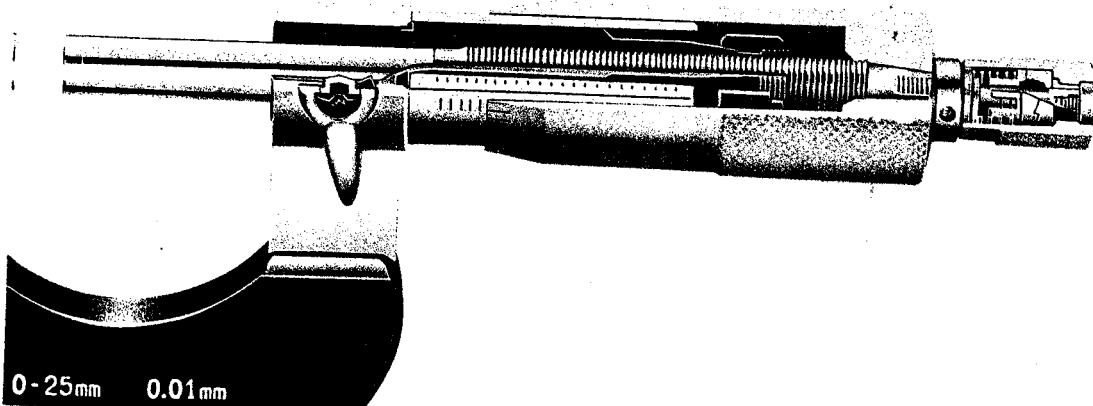


- Heat-insulated frame, tapered (on the anvil side) for hard-to-reach places.
- Carbide-tipped measuring faces.

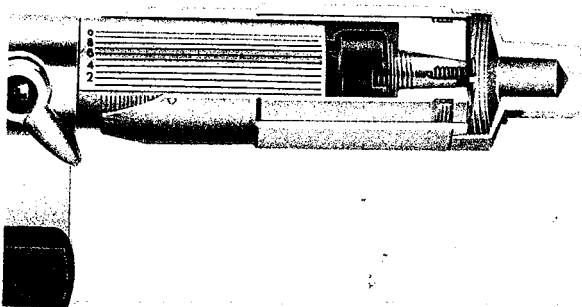

■ Specifications

Metric				
Range (mm)	Order No.	Graduation (mm)	Instrumental error (μm)	Type
0 - 25	102-217	0.01	±2	Ratchet
25 - 50	102-218	0.01	±2	Ratchet
50 - 75	102-236	0.01	±2	Ratchet
75 - 100	102-237	0.01	±3	Ratchet
0 - 25	102-221	0.01	±2	Friction thimble
25 - 50	102-222	0.01	±2	Friction thimble
0 - 25	102-119	0.001	±2	Ratchet
25 - 50	102-120	0.001	±2	Ratchet
0 - 25	102-123	0.001	±2	Friction thimble

Inch

Range (inch)	Order No.	Graduation (inch)	Instrumental error (μm)	Type
0 - 1	102-219	.001	±2	Ratchet
1 - 2	102-220	.001	±2	Ratchet
2 - 3	102-238	.001	±2	Ratchet
3 - 4	102-239	.001	±3	Ratchet
0 - 1	102-223	.001	±2	Friction thimble
1 - 2	102-224	.001	±2	Friction thimble
0 - 1	102-121	.0001	±2	Ratchet
1 - 2	102-122	.0001	±2	Ratchet
0 - 1	102-124	.0001	±2	Friction thimble
1 - 2	102-226	.0001	±2	Friction thimble

● Outside Micrometer Set

Total Range (mm)	Order No.	Set configuration	
		Micrometer	Standard
0 - 100	102-902	102-217,218,236,237	3 pcs.

Accuracy

- Flatness: 0.3μm for 0.001mm graduation  
1.6μm for 0.01mm graduation
- Parallelism: 1μm for up to 25mm  
2μm for up to 100mm